


Use the guide below to select the furling system that best suits your boat.
Cross reference boat length, sail type, sail area and Safe Working Load (SWL)*

Choose By Sail Type

Boat Length (ft)	Structural sail	Staysail - Storm Jib	Code 0	Gennaker / A Spinnaker
≤ 42	Contact us	PF1-PF3	PF3	PF1-PF3
≤ 52	Contact us	PF3-PF4	PF4	PF4
≤ 65	Contact us	PF4-PF6	PF6	PF6
≤ 78	Contact us	PF6-PF8	PF8-PF10	PF8-PF10
≤ 90	Contact us	PF10	PF10-PF12	PF10-PF12
> 90	Contact us	Contact us	Contact us	Contact us

Choose By Max Sail Area / Safe Working Load

powerfurl.	Gennaker/Code 0 Sail area (m2)	Staysail - Storm Jib Sail area (m2)	SWL (kg)
powerfurl.[one]	≤ 60	≤ 20	1,500
powerfurl.[three]	≤ 100	≤ 35	3,000
powerfurl.[four]	≤ 140	≤ 50	4,500
powerfurl.[six]	≤ 200	≤ 65	6,000
powerfurl.[eight]	≤ 280	≤ 75	8,000
powerfurl.[ten]	≤ 350	≤ 80	10,000
powerfurl.[twelve]	≤ 450	≤ 85	12,000

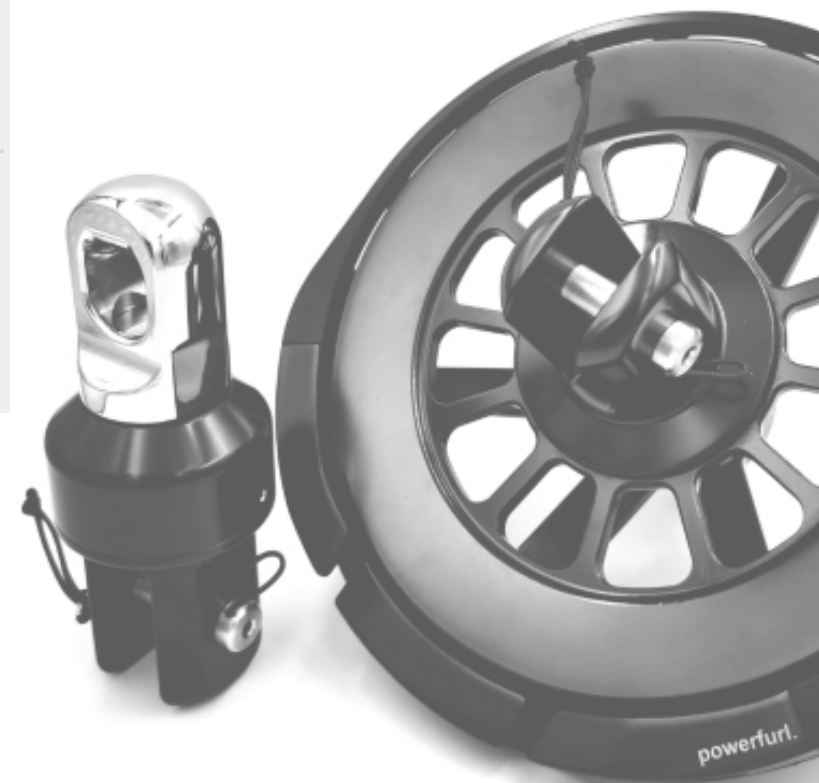

Note: For boats over 90 ft, please reach out for a custom solution tailored to your specific needs.

*Only initial guidelines. Please contact us for tailored recommendations on how to choose and use our powerfurl. systems.
A member of our team will offer a personalised advice based on your boat characteristics and specific sailing habits.